




UBC

630/622/62300

BALL BEARINGS

10 – 50 MM ID

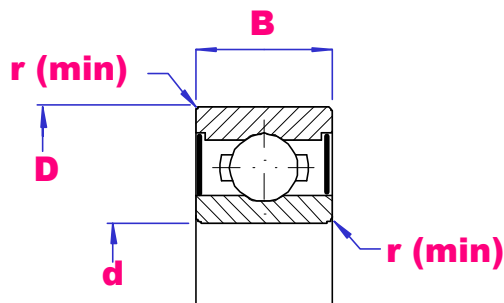

PART NO	d mm	D mm	B mm	rmin mm	Load D-kN	Load S-kN	Limiting speed Open/oil 2rs		Wgt g
63000	10	26	12	0.3	4.55	1.97	36000	22000	25
62200		30	14	0.6	5.10	2.39	30000	18000	40
63001	12	28	12	0.3	5.10	2.37	32000	18000	29
62201		32	14	0.6	6.80	3.05	28000	17000	45
62301		37	17	1.0	7.60	1.65	24000	14000	70
63002	15	32	13	0.3	5.60	2.83	28000	15000	39
62202		35	14	0.6	7.65	3.75	24000	14000	54
62302		42	17	1.0	11.4	5.45	20000	13000	110
63003	17	35	14	0.3	6.00	3.25	26000	13000	52
62203		40	16	0.6	9.55	4.80	20000	12000	83
62303		47	19	1.0	13.6	6.65	18000	11000	152
63004	20	42	16	0.6	9.40	5.00	20000	11000	86
62204		47	18	1.0	12.8	6.60	18000	10500	130
62304		52	21	1.1	15.9	7.90	17000	10000	235
63005	25	47	16	0.6	10.1	5.85	18000	9500	102
62205		52	18	1.0	14.0	7.85	15000	9000	152
62305		62	24	1.1	20.6	11.2	13000	8000	325
63006	30	55	19	1.0	13.2	8.30	15000	8000	163
62206		62	20	1.0	19.5	11.3	13000	7500	244
62306		72	27	1.1	26.7	15.1	12000	6700	485
63007	35	62	20	1.0	16.0	10.3	13000	6700	216
62207		72	23	1.1	25.7	15.3	11000	6300	377
62307		80	31	1.5	33.5	19.2	10000	6000	668
63008	40	68	21	1.0	16.8	11.5	12000	6000	261
62208		80	23	1.1	29.1	17.8	10000	5600	442
62308		90	33	1.5	40.5	23.9	9000	5300	895
63009	45	75	23	1.0	20.9	15.2	11000	5300	340
62209		85	23	1.1	31.5	20.4	9000	5100	485
62309		100	36	1.5	53.0	32.1	8000	4800	1150
63010	50	80	23	1.0	21.8	16.6	10000	4800	375
62210		90	23	1.1	36.5	23.2	8500	4600	525
62310		110	40	2.0	62.2	38.5	7500	4300	1555