




UBC

DOUBLE ROW ANGULAR CONTACT BALL BEARINGS

8 – 40 MM ID

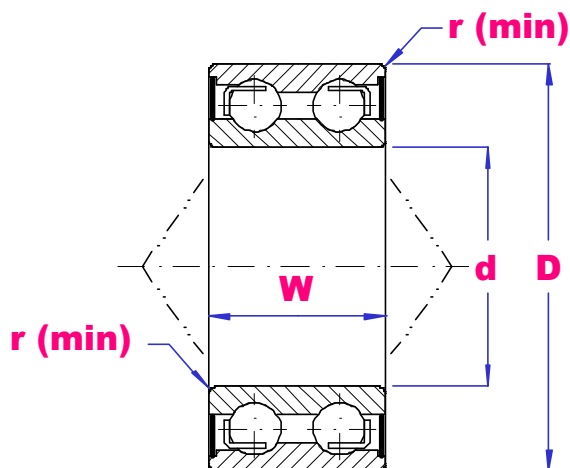

PART NO	d mm	D mm	W mm	r _{min} mm	Load D-kN	Load S-kN	Limiting speed Open/oil 2rs		Wgt g
50/8	8	22	11	0.3	5.2	2.61	26000	20000	19
5000	10	26	12	0.3	5.7	3.25	24000	17500	22
5200		30	14.3	0.6	7.15	3.93	22000	13000	60
5001	12	28	12	0.3	6.2	3.75	22500	17000	25
5201		32	15.9	0.6	10.5	5.79	20000	12000	65
5002	15	32	13	0.3	8.6	5.4	18500	14500	36
5202		35	15.9	0.6	11.7	7.05	17000	11000	70
5302		42	19.0	1.0	17.6	10.2	15000	11000	110
5003	17	35	14	0.3	9.2	6.2	16000	12500	42
5203		40	17.5	0.6	14.6	9.05	15000	10000	90
5303		47	22.2	1.1	21.1	12.6	13000	8500	140
5004	20	42	16	0.6	14.5	9.6	14000	11000	80
5204		47	20.6	1.0	19.6	12.4	13000	8500	120
5304		52	22.2	1.1	24.6	15.1	12000	7500	230
5005	25	47	16	0.6	15.5	11.1	8300	12300	101
5205		52	20.6	1.0	21.3	14.7	11000	7500	190
5305		62	25.4	1.1	32.5	20.7	10000	6500	340
5006	30	55	19	1.0	20.3	15.6	10000	8000	160
5206		62	23.8	1.0	29.6	21.1	9500	6300	290
5306		72	30.2	1.1	40.5	28.1	8500	5600	510
5007	35	62	20	1.0	24.5	21.4	6500	8500	205
5207		72	27.0	1.1	39.1	28.7	8000	5300	430
5307		80	34.9	1.5	51.1	36.1	7500	5000	790
5008	40	68	21	1.0	25.5	21.7	8000	6100	252
5208		80	30.2	1.1	44.1	33.5	7100	4800	570
5308		90	36.5	1.5	56.5	41.1	6700	4500	1050