




UBC

DEEP GROOVE BALL BEARINGS

5 - 9 MM ID

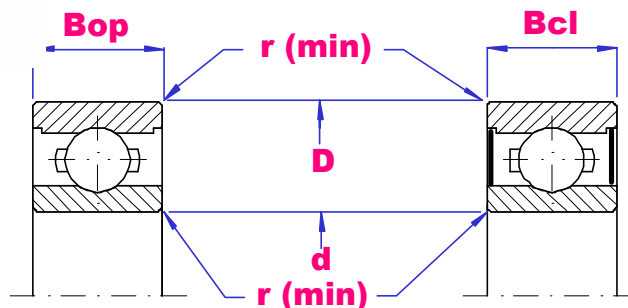

PART NO	d mm	D mm	Bop mm	Bcl mm	rmin mm	Load D-Kn	Load S-Kn	Limiting speed			Wgt g
								Open/oil	zz	2rs	
MR85	5	8	2.0	2.5	0.10	0.311	0.120	63000	53000	-	0.34
MR95		9	2.5	3.0	0.15	0.431	0.168	60000	50000	-	0.58
MR105		10	3.0	4.0	0.15	0.431	0.168	60000	48000	-	1.29
685		11	3.0	5.0	0.15	0.715	0.281	53000	45000	30000	1.96
695		13	4.0	4.0	0.20	1.08	0.430	50000	43000	28000	2.50
605		14	5.0	5.0	0.20	1.33	0.505	47000	40000	26000	3.48
625		16	5.0	5.0	0.30	1.73	0.670	43000	36000	24000	4.86
635		19	6.0	6.0	0.30	2.34	0.885	40000	32000	22000	8.34
MR106	6	10	2.5	3.0	0.15	0.495	0.218	53000	45000	-	0.68
MR126		12	3.0	4.0	0.20	0.715	0.292	50000	43000	-	1.74
686		13	3.5	5.0	0.15	1.08	0.440	48000	40000	28000	2.69
696		15	5.0	5.0	0.20	1.73	0.670	45000	38000	26000	3.72
606		17	6.0	6.0	0.30	2.26	0.835	40000	34000	24000	6.55
626		19	6.0	6.0	0.30	2.34	0.885	38000	32000	22000	7.94
636		22	7.0	7.0	0.30	3.30	1.375	36000	30000	20000	14.0
MR117	7	11	2.5	3.0	0.15	0.455	0.201	50000	43000	-	0.72
MR137		13	3.0	4.0	0.20	0.54	0.276	48000	40000	-	2.02
687		14	3.5	5.0	0.15	1.17	0.510	45000	38000	25000	2.97
697		17	5.0	5.0	0.30	1.61	0.710	43000	36000	23000	5.12
607		19	6.0	6.0	0.30	2.34	0.885	40000	34000	22000	7.51
627		22	7.0	7.0	0.30	3.30	1.37	36000	30000	20000	12.9
637		26	9.0	9.0	0.30	4.05	1.62	34000	28000	19000	25.0
MR128	8	12	2.5	3.5	0.15	0.545	0.275	48000	40000	-	0.97
MR148		14	3.5	4.0	0.20	0.820	0.385	45000	38000	-	2.16
688		16	4.0	5.0	0.20	1.26	0.590	43000	36000	24000	4.0
698		19	6.0	6.0	0.30	2.24	0.910	41000	34000	22000	7.18
608		22	7.0	7.0	0.30	3.30	1.37	39000	32000	20000	12.2
628		24	8.0	8.0	0.30	3.35	1.43	34000	28000	19000	17.4
638		28	9.0	9.0	0.30	4.55	1.97	30000	26000	18000	28.6
689	9	17	4.0	5.0	0.20	1.33	0.665	43000	36000	22000	4.43
699		20	6.0	6.0	0.30	1.72	0.840	40000	34000	20000	8.33
609		24	7.0	7.0	0.30	3.35	1.43	38000	32000	19000	14.7
629		26	8.0	8.0	0.30	4.55	1.97	33000	26000	18000	19.3
639		30	10.0	10.0	0.60	5.10	2.39	29000	24000	17000	36.0