




# UBC CHAIN



Quality  
Endorsed  
Company  
ISO 9001:2000  
LIC QEC20818

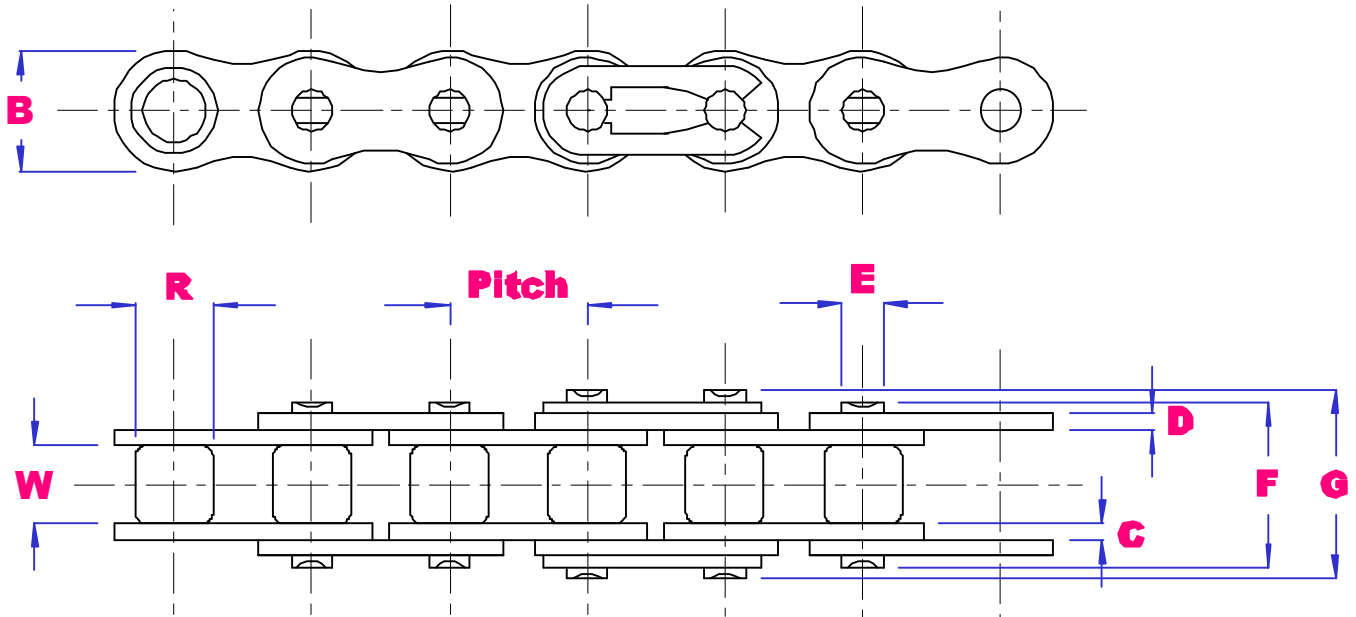

PART NO	Pitch		W mm	R mm	B mm	C mm	D mm	E mm	F mm	G mm	Av kgf	Wgt kg/m
	inch	mm										
25H-1	1/4	6.35	3.18	3.3	6.0	1.0	1.0	2.31	8.9	9.5	560	0.16
06B	3/8	9.525	5.72	6.35	8.2	1.0	1.25	3.28	13.2	14.1	1050	0.39
06BH	3/8	9.525	5.72	6.35	8.2	1.6	1.6	3.28	14.3	15.3	1580	0.48
35-1	3/8	9.525	4.77	5.08	9.0	1.3	1.3	3.58	12.4	13.2	1080	0.33
08B	1/2	12.7	7.75	8.51	11.8	1.5	1.5	4.44	16.7	18.2	1850	0.65
08B-2	1/2	12.7	7.75	8.51	11.8	1.5	1.5	4.44	31.2	32.2	3600	1.31
41-1	1/2	12.7	6.25	7.77	9.91	1.3	1.3	3.58	13.8	15.0	1260	0.41
40-1	1/2	12.7	7.85	7.95	12.0	1.5	1.5	3.96	16.6	17.8	1750	0.62
10B	5/8	15.88	9.65	10.16	14.7	1.65	1.65	5.08	19.2	20.9	2700	0.92
50-1	5/8	15.88	9.4	10.16	15.1	2.03	2.03	5.08	20.7	22.2	2940	1.02
12B	3/4	19.05	11.68	12.07	16.0	1.8	1.8	5.72	22.2	24.2	3300	1.24
60-1	3/4	19.05	12.57	11.91	18.0	2.42	2.42	5.94	25.9	27.7	4150	1.50
C2060H	1.1/2	38.1	12.7	11.91	17.1	3.1	3.1	5.95	28.2	29.8	5300	1.45
16B	1	25.4	17.02	15.88	21.0	3.1	4.15	8.28	36.1	37.4	7280	2.71
80-1	1	25.4	15.75	15.88	24.0	3.25	3.25	7.92	32.7	35.0	6940	2.60