




# UBC

## NA200R3

### TRIPLE LIP SEAL BEARING INSERT



Quality  
Endorsed  
Company  
ISO 9001:2000  
LIC QEC20818

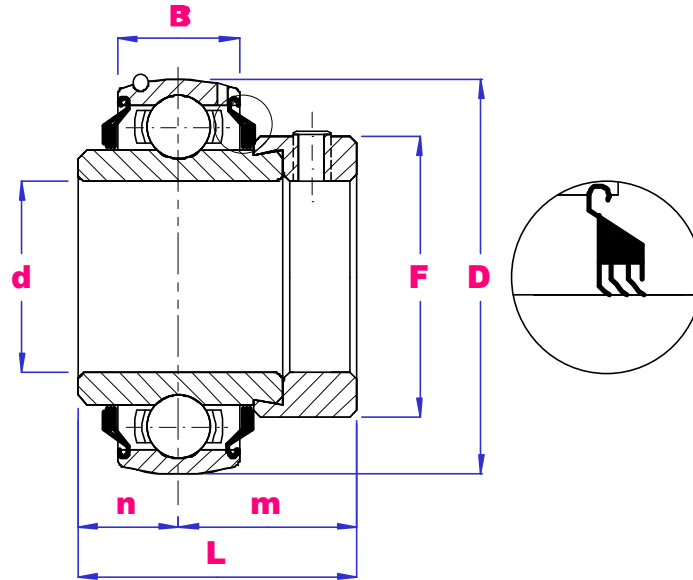

PART NO	d	D	L	B	n	m	F	Load D-Kn	Load S-Kn	Max Rpm	Wgt kg
NA204R3	20	47	43.7	17	17.1	26.6	33.3	12.81	6.65	900	0.22
NA205R3	25	52	44.4	17	17.5	26.9	38.1	14.11	9.93	800	0.25
NA206R3	30	62	48.4	19	18.3	30.1	44.5	19.49	11.31	700	0.41
NA207R3	35	72	51.1	20	18.8	32.3	55.6	25.68	15.31	600	0.60
NA208R3	40	80	56.3	21	21.4	34.9	60.3	29.12	19.84	540	0.78
NA209R3	45	85	56.3	22	21.4	34.9	63.5	32.52	20.46	480	0.85
NA210R3	50	90	62.7	24	24.6	38.1	69.9	35.05	23.18	440	1.01
NA211R3	55	100	71.4	25	27.8	43.6	76.2	43.48	29.22	400	1.39

#### INCH BORES

G1012KPPB3/NA204-12R3	3/4	47	43.7	17	17.1	26.6	33.3	12.81	6.65	900	0.22
G1014KPPB3/NA205-14R3	7/8	52	44.4	17	17.5	26.9	38.1	14.11	9.93	800	0.29
G1015KPPB3/NA205-15R3	15/16										0.27
G1100KPPB3/NA205-16R3	1										0.24
G1102KPPB3/NA206-18R3	1.1/8	62	48.4	19	18.3	30.1	44.5	19.49	11.3	700	0.43
G1103KPPB3/NA206-19R3	1.3/16										0.41
G1103KPPB4/NA206-20R3	1.1/4										0.38
G1104KPPB2/NA207-20R3	1.1/4	72	51.1	20	18.8	32.3	55.6	25.68	15.31	600	0.68
G1106KPPB2/NA207-22R3	1.3/8										0.61
G1107KPPB2/NA207-23R3	1.7/16										0.58
G1108KPPB3/NA208-24R3	1.1/2	80	56.3	21	21.4	34.9	60.3	29.12	19.84	540	0.83
G1111KPPB4/NA209-27R3	1.11/16	85	56.3	22	21.4	34.9	63.5	32.52	20.46	480	0.91
G1112KPPB4/NA209-28R3	1.3/4										0.87
G1114KPPB3/NA210-30R3	1.7/8	90	62.7	24	24.6	38.1	69.9	35.05	23.18	440	1.10
G1115KPPB3/NA210-31R3	1.15/16										1.04
G1200KPPB4/NA211-32R3	2	100	71.4	25	27.8	43.6	76.2	43.48	29.22	400	1.58
G1203KPPB4/NA211-35R3	2.3/16										1.36