




UBC

PRESSED METAL - - INJECTION MOULDED BEARINGS



Quality
Endorsed
Company
ISO 9001:2000
LIC QEC20818

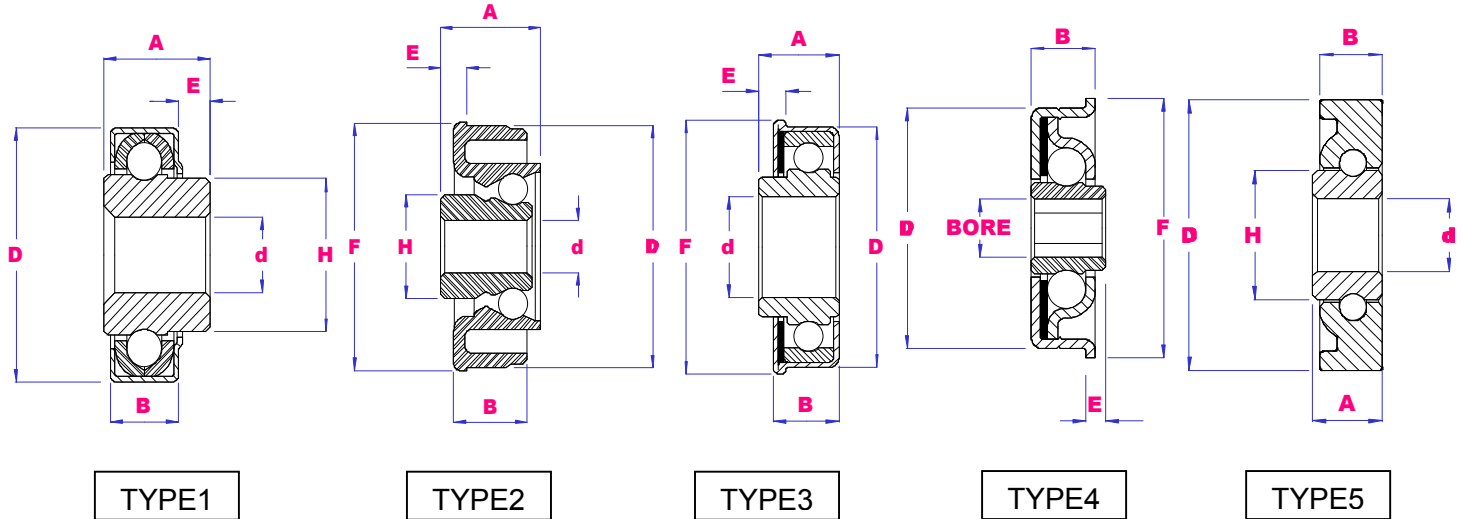

PART NO	MAT	TYPE	d mm	D mm	A mm	B mm	E mm	F mm	H mm	Wgt g
RW08	STEEL	3	8.1	28.7	19.7	9.5	4.8	31.8	17.5	49
S29081PE	STEEL	5	8.1	28.9	7.7	7.1	-	-	13.9	26
BE090	NYLON	2	8.2	21.8	11.9	11.7	2.5	24.8	13.2	6
PB4908	STEEL	1	8.4	49.2	22.3	14.5	4.4	-	12.5	90
ACUR10	STEEL	4	10HEX	47.5	15.4	12.1	4.6	50.9	16.5	90
BE115	STEEL	4	10.5	45.7	22.3	13.5	9.2	47.6	19.9	115
S47101UGP	STEEL	4	10.5	47.5	18.9	14.4	5.8	50.8	17.8	97
N48101UG	NYLON	2	10.5	47.6	21.3	15.8	5.5	50.0	20.8	36
BE145	NYLON	2	10.5	48.7	21.3	15.8	5.5	50.2	20.8	39
ACUR11	STEEL	4	11HEX	47.5	15.8	12.1	6.0	50.9	16.9	84
ACUR12	STEEL	4	12	47.5	15.8	12.1	6.0	50.9	16.9	81
S43121UG	STEEL	4	12.5	43	18.7	13.8	4.9	-	19.1	84
WB5/8	STEEL	3	15.9	34.9	11.4	9.9	2.95	38.0	22.2	47
S54161UG	STEEL	1	16.5	54	23.95	14.6	8.5	-	-	229
WB3/4	STEEL	3	19.2	34.9	11.4	9.9	2.95	38.0	22.2	42
WB20	STEEL	3	20.1	34.9	11.4	9.9	2.95	38.0	22.2	42
WB20MM	STEEL	3	20.1	47	15.9	12.9	5.2	51.5	28.1	106
WB1X2	STEEL	3	25.6	50.8	15.9	12.9	3.85	54.0	31.2	114