




UBC

ANGULAR CONTACT BALL BEARINGS 10 – 50MM ID

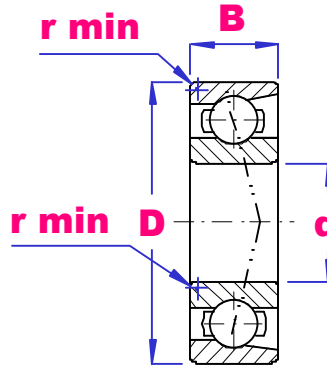

PART NO	d mm	D mm	B mm	rmin mm	Load D-kN	Load S-kN	Limiting speed		Wgt kg
							oil	grease	
7000	10	26	8	0.3	5.45	2.42	25500	12900	0.014
7200		30	9	0.6	6.35	2.72	23500	11000	0.027
7001	12	28	8	0.3	5.95	2.87	23500	11900	0.018
7201		32	10	0.6	8.05	3.74	22500	11000	0.041
7002	15	32	9	0.3	6.75	3.62	21000	10400	0.027
7202		35	11	0.6	8.75	4.36	20000	9900	0.054
7003	17	35	10	0.3	7.10	4.07	19000	9600	0.036
7203		40	12	0.6	10.7	5.55	18000	8900	0.073
7303		47	14	1.0	16.6	8.31	16000	8100	0.136
7004	20	42	12	0.6	10.7	5.88	16000	8300	0.059
7204		47	14	1.0	15.4	8.22	15000	7800	0.122
7304		52	15	1.1	19.3	9.85	14000	7300	0.177
7005	25	47	12	0.6	12.5	7.89	15000	7300	0.073
7205		52	15	1.0	16.4	9.35	14000	6900	0.150
7305		62	17	1.1	25.0	13.4	12500	6200	0.263
7006	30	55	13	1.0	16.1	10.7	12600	6300	0.104
7206		62	16	1.0	23.4	14.3	12000	5900	0.231
7306		72	19	1.1	33.7	19.4	10500	5300	0.395
7007	35	62	14	1.0	19.5	13.4	11200	5600	0.168
7207		72	17	1.1	30.3	19.1	10000	5100	0.318
7307		80	21	1.5	37.4	22.2	9500	4800	0.517
7008	40	68	15	1.0	20.9	15.5	10000	5100	0.209
7208		80	18	1.1	35.5	23.1	9000	4600	0.417
7308		90	23	1.5	49.3	29.9	8000	4200	0.717
7009	45	75	16	1.0	25.7	19.9	9100	4600	0.263
7209		85	19	1.1	37.2	25.4	8500	4200	0.481
7309		100	25	1.5	60.5	38.8	7600	3800	0.971
7010	50	80	16	1.0	25.5	20.3	8500	4200	0.286
7210		90	20	1.1	38.8	27.8	7600	3900	0.531
7310		110	27	2.0	72.2	47.1	6900	3400	1.271