




UBC

1200/2200

SELF ALIGNING BALL BEARINGS

10 – 60 MM ID

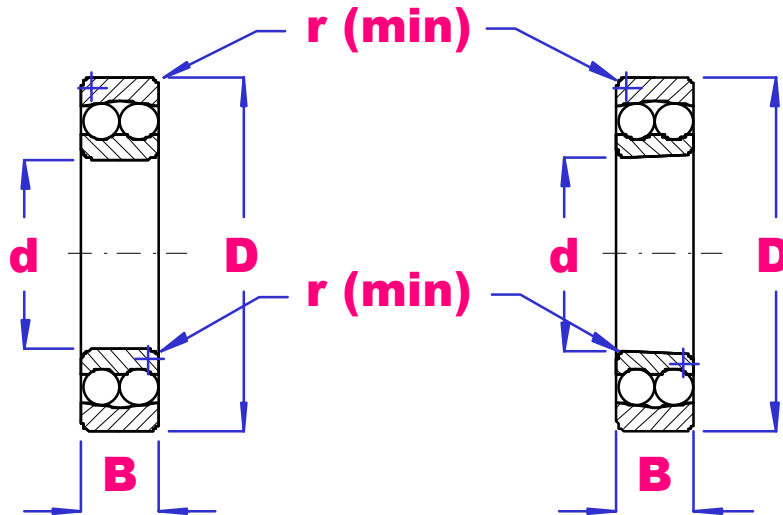

PART NO	d mm	D mm	B mm	rmin mm	Load D-kN	Load S-kN	Limiting speed		Wgt g
							oil	grease	
1200	10	30	9	0.6	5.55	1.19	28000	22000	33
1201	12	32	10	0.6	5.70	1.27	26000	22000	39
1202	15	35	11	0.6	7.60	1.75	22000	18000	48
1203	17	40	12	0.6	8.00	2.01	20000	16000	72
1204	20	47	14	1.0	10.0	2.61	17000	14000	121
2204			18	1.0	12.8	3.30	17000	14000	133
1205	25	52	15	1.0	12.2	3.30	14000	12000	142
2205			18	1.0	12.4	3.45	14000	12000	153
1206	30	62	16	1.0	15.8	4.65	12000	10000	221
2206			20	1.0	15.3	4.55	12000	10000	249
1207	35	72	17	1.1	15.9	5.10	10000	8500	322
2207			23	1.1	21.7	6.60	10000	8500	378
1208	40	80	18	1.1	19.3	6.50	9000	7500	415
2208			23	1.1	22.4	7.35	9000	7500	477
1209	45	85	19	1.1	22.0	7.35	8500	7100	465
2209			23	1.1	23.3	8.15	8500	7100	522
1210	50	90	20	1.1	22.8	8.10	8000	6300	525
2210			23	1.1	23.4	8.50	8000	6300	564
1211	55	100	21	1.5	26.9	10.0	7100	6000	705
2211			25	1.5	26.7	9.90	7100	6000	746
1212	60	110	22	1.5	30.5	11.5	6300	5300	905
2212			28	1.5	34.0	12.6	6300	5300	1032

AVAILABLE IN TAPERED BORE "K" SUFFIX